




PennTex

INDUSTRIES, INC.

MODEL

PX-833**Air Cooled
28-volt 330 amps**

HIGH AMPERAGE/HEAVY DUTY ALTERNATORS/CHARGING SYSTEMS

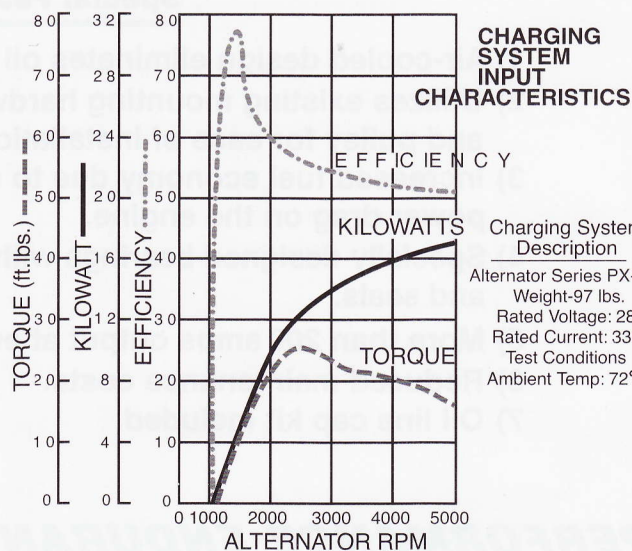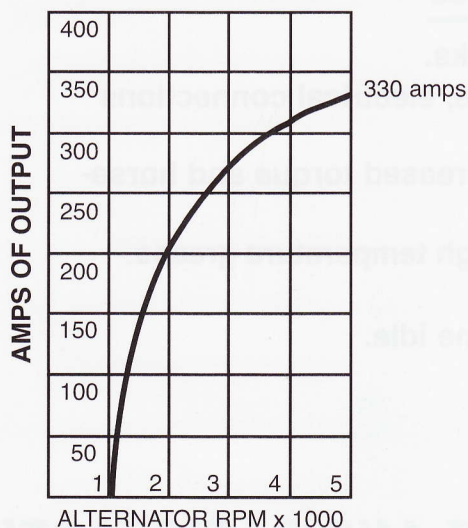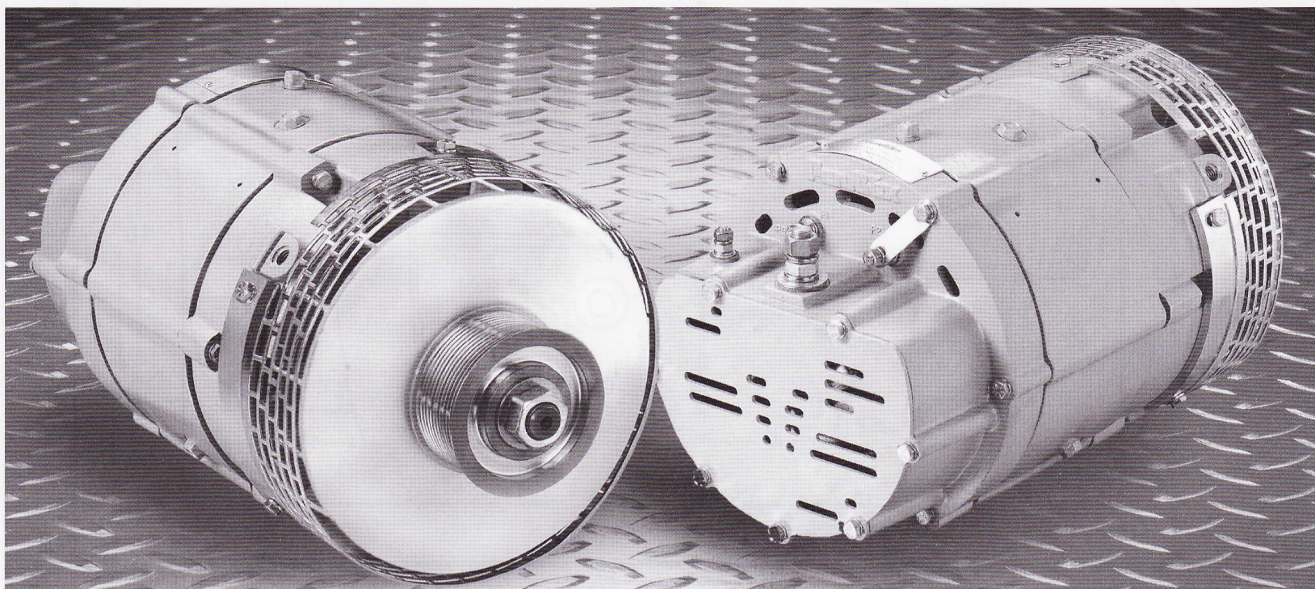

CHARGING SYSTEM INPUT CHARACTERISTICS

Charging System Description
Alternator Series PX-833
Weight-97 lbs.
Rated Voltage: 28
Rated Current: 330
Test Conditions
Ambient Temp: 72°F

WARRANTY

PENNTEx INDUSTRIES, INC., STANDARD PX-8 SERIES WARRANTY IS TWENTY-FOUR (24) MONTHS/UNLIMITED MILEAGE WHEN INSTALLED ON A NEW OEM VEHICLE. AFTERMARKET INSTALLATIONS HAVE A WARRANTY OF TWELVE (12) MONTHS/UNLIMITED MILES.


APPLICATIONS

- Transit buses and motorcoaches that require high amperage output.
- Upgrade for 28 volt 50 DN, belt drive models.
- See application guide or contact PennTex for availability of specific application.

OPTIONS

- Cable Support Clamp Kit, part no. PX-8150

PX-833 Air Cooled Alternator 28volt / 330amps

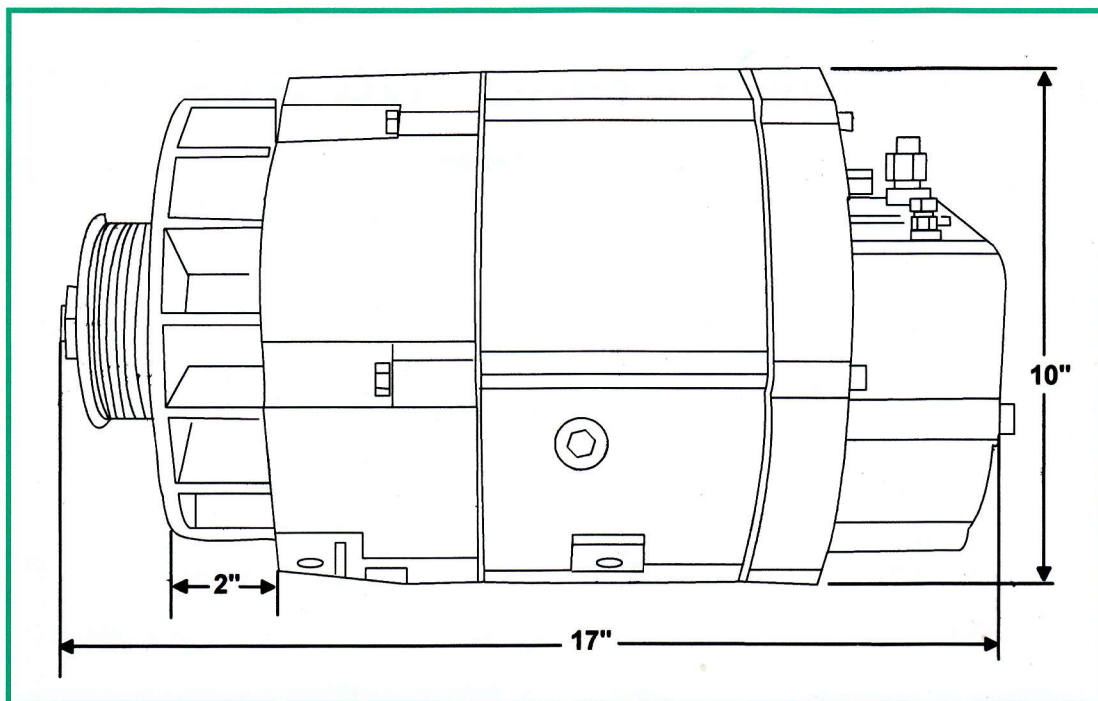

Special Features

- 1) Air-cooled design eliminates oil leaks.
- 2) Utilizes existing mounting hardware, electrical connections and pulley for ease of installation.
- 3) Increased fuel economy due to decreased torque and horsepower drag on the engine.
- 4) Specially designed bearings with high temperature grease and seals.
- 5) More than 200 amps output at engine idle.
- 6) Reduced maintenance costs.
- 7) Oil line cap kit included.

PERFORMANCE ENDURANCE AND SATISFACTION

PennTex
INDUSTRIES, INC.

Manufacturers of
High Efficiency Alternators and
Mobile Electronic Devices.

Corporate:
202 Plaza Drive
Manchester, PA 17345
Ph: 717/266-8762
Fax: 717/266-7803

www.penntexusa.com
E Mail sales@penntexusa.com

Manufacturing:
7620 Flagstone Drive
Fort Worth, TX 76118
Ph: 817/590-2818
Toll Free: 877/590-7366
Fax: 817/590-0505

