

# FOR DELPHI "AD" SERIES ALTERNATOR (AD230, 237, 244)



**311-6020**

Repl: 10494503, DR4400HD  
 NOTE: 50Amp Diodes,  
 6mm battery post  
 FOR: AD237, AD244 series




**311-6040**

Repl: 10494744, DR4400  
 NOTE: 35Amp Diodes,  
 6mm battery post  
 FOR: AD230 series

OEM


**TADITEL™**

**FOR AD SERIES ALTERNATORS**

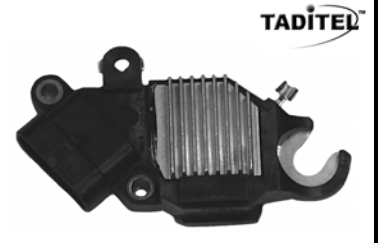


**101-6820**

Repl: 19060319, 19054622,  
 19053730, 19053013, 10486311,  
 10483643  
 NOTE: Voltage Set Point 14.8V  
 2.5 Sec LRC

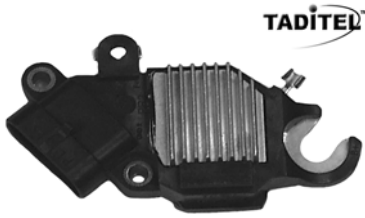


**101-6830**

Repl: 19051739, 10454669  
 NOTE: Voltage Set Point 14.2V  
 2.5 Sec LRC

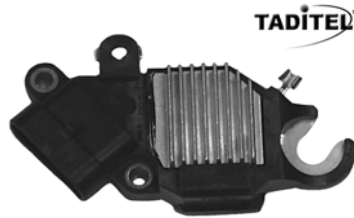


**101-6810**

Repl: 10483777, 10453673  
 NOTE: Voltage Set Point 15.13V  
 10 Sec LRC

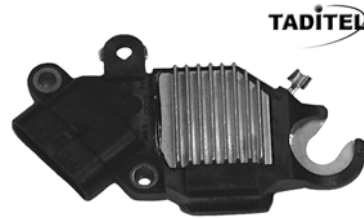

**101-6840**

Repl: 19060146, 10484046,  
 10454656  
 NOTE: Voltage Set Point 14.8V  
 10 Sec LRC

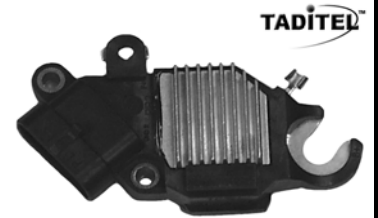

**101-6850**

Repl: 10494747  
 NOTE: Voltage Set Point 14.8V  
 2.5 Sec LRC

Lamp terminal can be connected to a bulb, resistor or engine computer

ISO 9001-2000 and QS 9000 certified

Only 1 lead to unsolder and solder

Eliminates corrosion created problem on bridge

U.S. Sales and engineering support

Increased transient protection to withstand the aftermarket environment

Short-circuit protected on all connections

Protects itself and bridge from over temperature by shutting down, then resumes operation when temperature returns to normal without a fault indication

Built with 100% OE materials and components

Total coverage for all GM AD alternators

**ASK FOR AN APPLICATION GUIDE WITH YOUR ORDER!!!**



Canada: 3325 North Service Road, Unit 4, Burlington, Ontario L7N 3G2  
 U.S.A: 60 Industrial Parkway, Cheektowaga, NY 14227  
 Tel: (905) 336-8830 Fax: (905) 336-8873 Toll Free: 1-800-387-4078 Toll Free Fax: 1-888-858-9317  
 Visit Our Web: [www.elreg.com](http://www.elreg.com) E-mail: [elreg@elreg.com](mailto:elreg@elreg.com)

Oct 20, 2006